






D 902 - 903

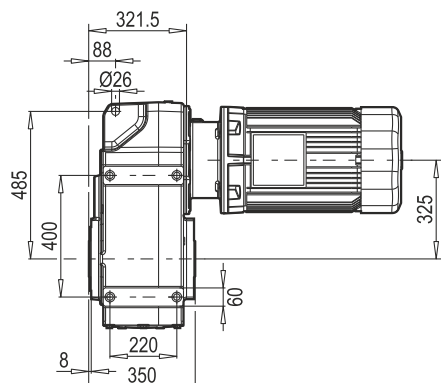


D 902 - 903 B14

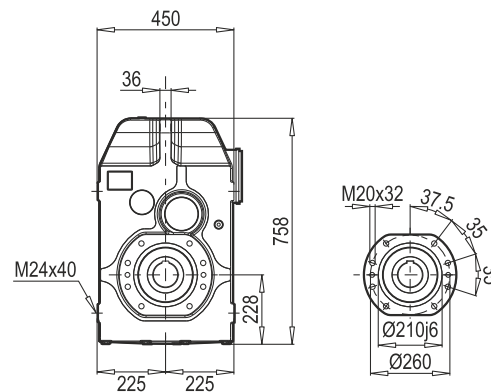




M 902 - 903

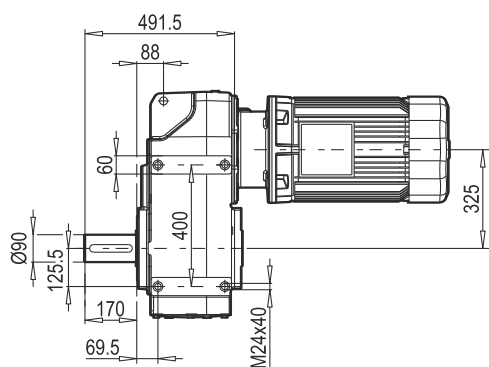



M 902 - 903 B14

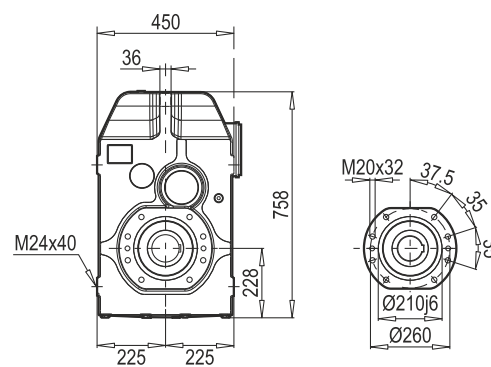



D/M 902 - 903 B5

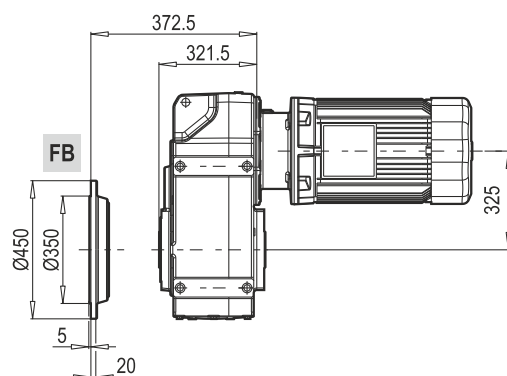



D 902 - 903 PAM B5/B14





D 902 - 903 W



M 902 - 903 PAM B5/B14





M 902 - 903 W





W ~ K _r	
D/M 902	217
D/M 903	222

D/M 902 - 903 B5 PAM B5/B14

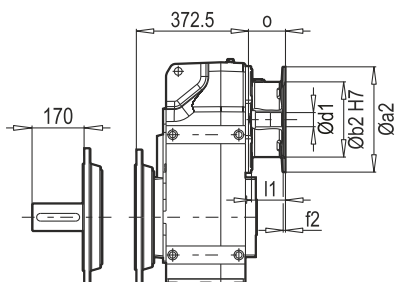

D/M 902 - 903 B5 W

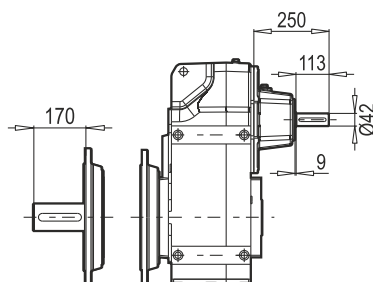

	PAM B5	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
D/M 902 D/M 903	132	300	230	265	10.5	M12	38	74	41.3	10	76
	160	350	250	300	10.5	M16	42	103.5	45.3	12	123
	180	350	250	300	10.5	M16	48	103	51.8	14	123
	200	400	300	350	13	M16	55	105	59.3	16	160
	225	450	350	400	15.5	M16	60	133	64.4	18	161

~ K _r		
PAM B5	D/M 902	D/M 903
132	205	210
160	215	220
180	215	220
200	235	240
225	245	250

	PAM B14	Øa2	Øb2	Øe2	f2	Øs2	Ød1	l1	t1	u1	o
D/M 902-903	132	201	130	165	10.5	M11	38	59	41.3	10	86

~ K _r		
PAM B14	D/M 902	D/M 903
132	205	210

Редуктор	i	4 - пол. 50 Гц 1400 об/мин n2[об/мин]	Ма макс f _B =1 4 - пол. [Нм]	P ₁ макс W f _B ≥ 1				IEC - PAM							
				4 - пол. 1400 об/мин [кВт]	FR1 [кН]	FR2 (M) [кН]	FR2 (D,KS) [кН]								
D 903 M 903 W  IEC - PAM 	226.90	6.2	7464	5.13	8.0	42.0	20.3	132							
	184.24	7.6	7443	6.30	8.0	42.0	20.3	132							
	163.57	8.6	7866	7.50	8.0	42.0	20.3	132							
	153.76	9.1	7503	7.61	8.0	42.0	20.3	132							
	141.57	9.9	7453	8.21	8.0	42.0	20.3	132	160						
	121.49	11.5	7440	9.55	8.0	42.0	20.3	132	160						
	110.84	12.6	7882	11.09	8.0	42.0	20.3	132	160						
	92.81	15.1	7498	12.60	8.0	42.0	20.3	132	160						
	87.58	16.0	7879	14.03	8.0	42.0	20.3	132	160	180					
	73.31	19.1	7502	15.96	8.0	42.0	20.3	132	160	180					
	66.90	20.9	7880	18.37	8.0	42.0	20.3	132	160	180					
	59.18	23.7	7498	19.76	8.0	42.0	20.3	132	160	180					
	52.84	26.5	7871	23.23	8.0	42.0	20.3	132	160	180					
	42.66	32.8	6565	24.00	8.0	42.0	20.3	132	160	180					
	38.56	36.3	5934	24.00	8.0	42.0	20.3	132	160	180					
D 902 M 902 W  IEC - PAM 	42.00	33.3	7621	27.71	5.1	33.5	16.3	160	180	200	225				
	33.76	41.5	8038	36.36	5.1	29.3	14.2	160	180	200	225				
	30.27	46.3	7207	36.36	5.1	29.6	14.3	160	180	200	225				
	26.89	52.1	6403	36.36	5.1	29.0	14.1	160	180	200	225				
	23.17	60.4	6515	42.94	5.1	27.7	13.4	160	180	200	225				
	19.84	70.6	5579	42.94	5.1	27.0	13.1	160	180	200	225				
	17.79	78.7	5002	42.94	5.1	27.7	13.4	160	180	200	225				
	16.70	83.8	4696	42.94	5.1	27.0	13.1	160	180	200	225				
	13.65	102.6	3838	42.94	5.1	27.2	13.2	160	180	200	225				
	12.82	109.2	3605	42.94	5.1	27.0	13.1	160	180	200	225				
	10.23	136.9	4353	64.98	5.1	23.2	11.3	160	180	200	225				
	8.80	159.1	3814	66.19	5.1	22.7	11.0	160	180	200	225				
	8.17	171.4	3659	68.39	5.1	22.5	10.9	160	180	200	225				
	7.37	190.0	3497	72.46	5.1	21.9	10.7	160	180	200	225				
	6.34	220.8	3168	76.30	5.1	21.3	10.3	160	180	200	225				
	5.87	238.5	3204	83.36	5.1	20.2	9.8	160	180	200	225				
	5.05	277.2	2996	90.61	5.1	19.4	9.5	160	180	200	225				
	4.36	321.1	2587	90.61	5.1	19.2	9.4	160	180	200	225				